


- Can be cuttable every 1 LEDs
- No Hotspot starting from 20 mm lightboxes
- CE directives compatible
- High efficacy >135lm/W
- DC 12V
- Clean lighting
- IP 20
- CRI 80

Beam Angle
170°

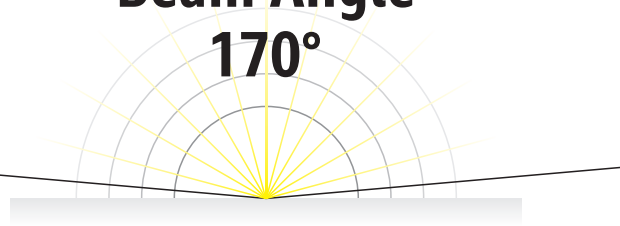

Technical Specifications

Operating Temperature	-30°C ~ +60°C	PCB Material	Aluminum	Finishing	UV Cured Adhesive	Adhesive Tape	3M Foam
Storage Temperature	-30°C ~ +60°C	Optics	Optical PMMA	Lifetime Tm21	>60.000 Hours	Packaging	576 Modules / Box

Rigidbar 430

3.6W

6W

	3.6W	6W			
Power	3,60 W	6,00 W			
Input Voltage	12V DC	12V DC			
LED Quantity	6	6			
Cutting Interval	12V	12V			
Beam Angle	170	170			
Length x Width x Depth	480 x 13,5 x 8mm	480 x 13,5 x 8mm			
60W Power Supply Loading	15 *	9 *			
Colors	Lumen	Lumen / W	Colors	Lumen	Lumen / W
<input type="checkbox"/> 10.000K	360	100	<input type="checkbox"/> 10.000K	600	100
<input type="checkbox"/> 6.500K	360	100	<input type="checkbox"/> 6.500K	600	100
<input type="checkbox"/> 3.000K	336	93	<input type="checkbox"/> 3.000K	561	93

Packaging Details



16 Modules/Row



576 Modules/Box



515 x 240 x 310 mm

NOTES: CCT Tolerance +-7%
Lumen Values Tolerance Vary +-10%
Special Power Options are available Upon Request
* %15 driver power-free space has been added to 60W driver